



COVERAGE WITHOUT COMPLICATIONS

ANNOUNCING NEW COMPACT MOTOTRBO™ SLR 1000 REPEATER

CLICK ON THE LINKS FOR
MORE INFORMATION:

- [SLR 1000 Website](#)
- [SLR 1000 Data Sheet](#)
- [SLR 1000 Brochure](#)
- [SLR 1000 Sales Presentation](#)

We are pleased to announce availability of the latest addition to the MOTOTRBO repeater portfolio – the SLR 1000.

Whether you want to eliminate dead zones or expand coverage to remote locations, count on the SLR 1000. Compact, easy to install, and designed to work indoors or outside, it's built to grow as your needs do.

The new repeater is small in size, but big on performance. Its compact size gives you more installation options, such as mounting on walls or poles, and the low power, fanless design uses less space and energy, reducing costs. SLR 1000 works with both conventional and trunking systems supporting voice and data, and is compatible with all MOTOTRBO system types.

The new SLR 1000 repeater is packed with features, including:

Wideband UHF design supports 400-527 MHz

Fanless design for less noise, less particulate intrusion, and greater reliability


IP65 rated for water and dust protection, so can be deployed indoors or outside

Analogue/DMR compatible to help ease migrate older systems

Click on the links to the right to learn more about the new repeater.



SLR 1000 LOW POWER REPEATER HIGHLIGHTS

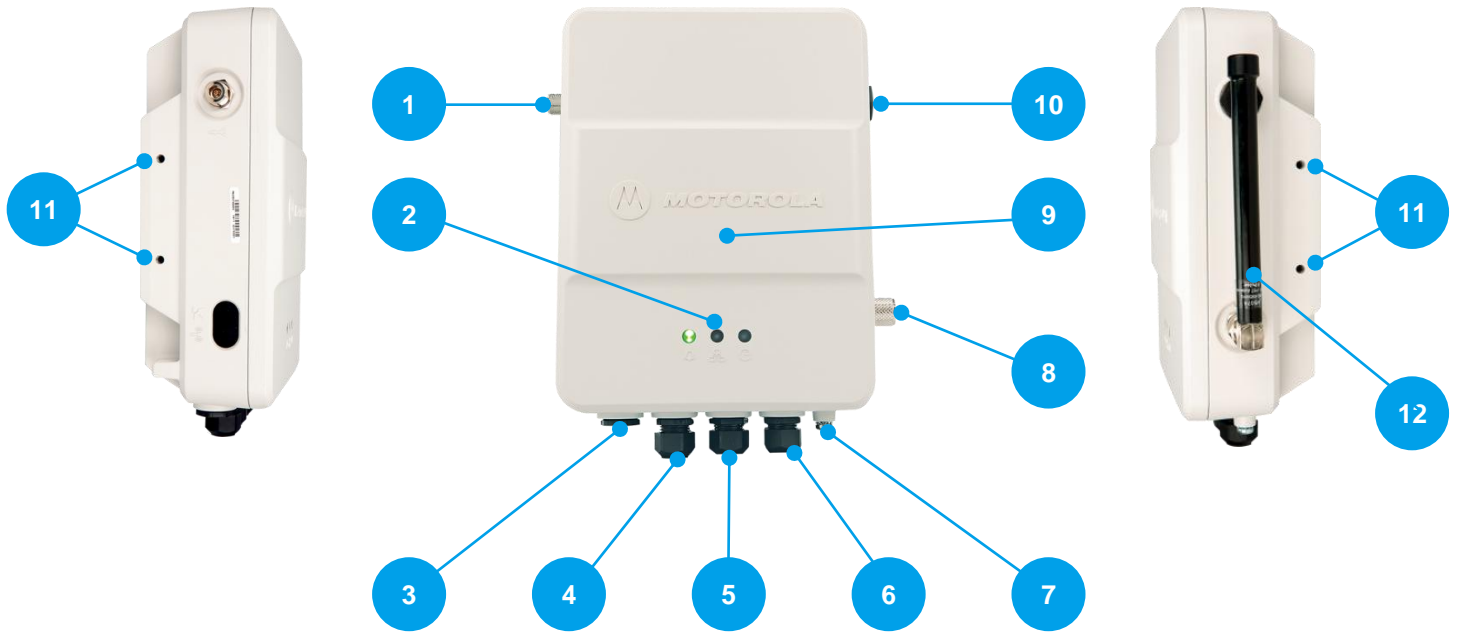

- | | |
|---|--|
| 1 Receiver RF (Rx) input cable port | 7 Bonding earth connection |
| 2 Status LEDs | 8 Transmitter RF (Tx) output cable port |
| 3 Type B USB socket programming interface | 9 IP65 enclosure |
| 4 RJ-45 – Ethernet network connection | 10 Pressure equalizer vent |
| 5 RJ-45 Aux/accessory connector: Rx Audio, Tx Audio, PTT, 1 PPS and GPIO | 11 Screw holes for mounting brackets |
| 6 DC power inlet | 12 Optional antenna |

- **UHF (400-527 MHz)**
- **1-10W transmit power, 100% duty cycle**
- **64 channels**
- **Dual analogue and digital capable**
 - Analogue conventional and MPT1327
 - DMR conventional, MOTOTRBO IP Site Connect, Capacity Plus, Capacity Max, Connect Plus and digital voting
- **DC input voltage 12Vdc (11.0-15.5Vdc)**
- **Compact IP65 enclosure can be wall or pole mounted**
- **Optional antenna, antenna switch kit, duplexer, pole mount kit, wall mount bracket and power supplies**
- **Service from the Start provides cost-effective coverage beyond the standard warranty with flexible multi-year contracts for up to five years**

